


IT 12180



		IT 10180		IT 12180	
Number of scissors		5		6	
		IT 10180 D	IT 10180 DE	IT 12180 D	IT 12180 DE
A	mm	10200		11900	
B	mm	12200		13900	
C	mm		300		
D	mm	2545		2685	
E	mm	1375		1515	
F	mm	1940		2080	
Capacity (including 3 people)	kg	500		-	
Capacity (including 2 people)	kg	-		350	
Diesel engine	kW			14,6	
Electric motor	V/kW	-	24/4	-	24/4
Start-up battery	V/Ah			12 / 66	
Traction battery	V/Ah	-	24 / 400	-	24 / 400
Start-up battery weight	kg			38	
Traction battery weight	kg	-	290	-	290
Battery charger	V/A	-	24 / 80	-	24 / 80
Oil tank capacity	l			35	
Traction speed 2 WD / 4 WD	km/h	Dies. = 4,5/1.2		Elect. = 2,8/0,75	
Traction speed (security)	km/h			0,6	
Gradeability	%			35% Diesel / 20% battery	
Internal steering radius	m			1,90	
External steering radius	m			4,51	
Tyre dimensions	mm			259 x 695	
Tyre type				27 x 10.5 - 15"	
Max side/longitudinal tilt angle	degrees			2 / 3	
Total weight	kg	4600		4760	

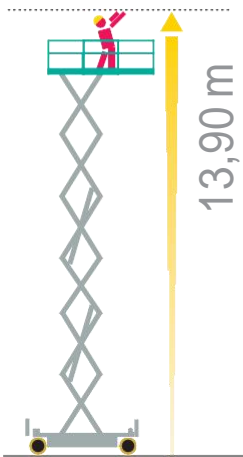